

## UP-X899MD

A6 Analog and Digital Black and White  
Thermal Printer



### Overview

The UP-X899MD is a compact A6 black-and-white digital printer and is the successor to Sony's medical printer UP-898 series. It delivers high speed, outstanding quality black & white printing with enhanced image accuracy, an improved user interface/printing cutter, and upgraded environmental performance.

### Features

#### **Store Still Images on a USB Flash Drive**

The UP-X899MD can automatically store printed still images from both digital and video input via a connected USB flash drive.

#### **Use with a Wide Range of Modalities**

A choice of analog composite video and PC-friendly digital USB inputs allows flexible use with a wide range of modality devices.

#### **Wide PC compatibility**

For maximum flexibility, a wide range of PC drivers are provided for Windows 10 and 11. When choosing compatible mode, you can select a 898/897 driver.

#### **Compliance with medical standards**

This product is distributed to the US and EU as a medical device and satisfies product safety standards (e.g., IEC 60601-1).

For more details, please contact your nearest Sony sales office or an authorized dealer.

### Specifications


#### Specifications

Printing Method	Direct thermal printing
Resolution	325 dpi
Gradation	8 bits (256 levels) processing
Picture elements	Digital: 1,280 x 2,560 dots Video NTSC: 720 x 504 dots Video PAL: 720 x 604 dots
Picture area	Digital: 100 x 200 mm (3 7/8 x 7 7/8 in) (Max) STD Video NTSC: 94 x 73 mm (3.7 x 2.87 in), Video PAL: 94 x 71 mm (3.7 x 2.8 in) (WIDE1) SIDE Video-NTSC: 96 x 124 mm (3.78 x 4.88 in), Video-PAL: 96 x 127 mm (3.78 x 5 in) (WIDE1)
Paper Size	Paper width of 110 mm (4 3/8 inches)

## Specifications

Printing Time	High-speed mode: Approx. 2 seconds/image (at standard setting) (1,280 x 960 dots) Normal speed mode: Approx. 3.8 seconds/image (at standard setting) (1,280 x 960 dots)
Interface	Hi-Speed USB connector (USB 2.0): type C (for data receiving) (x1) VIDEO IN: BNC type (NTSC or PAL composite video signals) (1)
Printer Driver SW	Microsoft Windows 10, 11
Picture requirements	AC 100 V to 240 V, 50/60 Hz
Input Current	0.75 A to 0.5 A
Operating Temperature	10 °C to 40 °C (50 °F to 104 °F)
Operating Humidity	20% to 80% (no condensation allowed)
Storage and transport temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Storage and transport humidity	20% to 90% (no condensation allowed)
Dimensions (W*H*D)	154 × 88 × 208 mm (6 1/8 × 3 1/2 × 8 1/4 in)
Mass	2.0 kg (4 lb 6.5 oz) (printer only)
Supplied Accessories	Thermal head cleaning sheet (1) CD-ROM (1) Before Using this Printer (1) Service Contact List (1) Thermal Print Media UPP-110HG/SET(1) Information for customers in Europe (1)
EC directive	* The values for dimensions are approximate. This product is distributed to the US and EU as a medical device and satisfies product safety standards (e.g. IEC 60601-1)**. ** For more details, please contact your nearest Sony sales office or an authorized dealer.

## Gallery

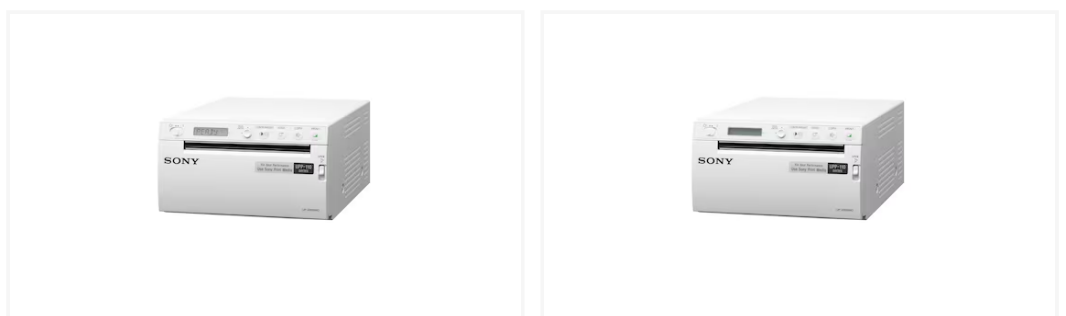



---

© 2004 - 2026 Sony Corporation. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. The values for mass and dimension are approximate. All trademarks are the property of their respective owners.